


Fireshield®

DESCRIPTION

Fireshield is a vapour permeable walling underlay with an intumescent coated surface. Fireshield is suitable for all walling applications including those in multiple storey buildings. The intumescent coating helps protect the substrate by reducing the risk of fire taking hold and significantly reduces the formation of droplets and smoke. It is installed and fixed to the substrate in the same manner as standard breather membranes using mechanical fixings.

PHYSICAL PROPERTIES

Property	Test Method	Mean Results
Roll Size	-	1.1m x 20m
Weight	EN 1849-2	737g/m ²
Thickness	EN 1849-2	1.2mm
Nail Tear Resistance	EN 12310-1	MD 273N CD 330N
Resistance to water penetration	EN 13859-1	Class W1
Tensile Strength	EN 12311-1	MD 300N/5cm CD 275N/5cm
Elongation	EN 12311-1	MD 2-3% CD 2-3%
Water impermeability	EN 20811	Minimum value: 2m
UV resistance	Internal method, UVB	3 months
Water vapour transmission properties	EN ISO 12572 conditions C	Sd=0.08m
Flexibility at low temperature	EN 1109	-20°C
Reaction to Fire	EN 13501-1 Test method: EN 11925-2 and EN 13823 (SBI)	B, s1, d0
Resistance to air penetration	EN 12114	1m ³ /m ² /hr@50Pa

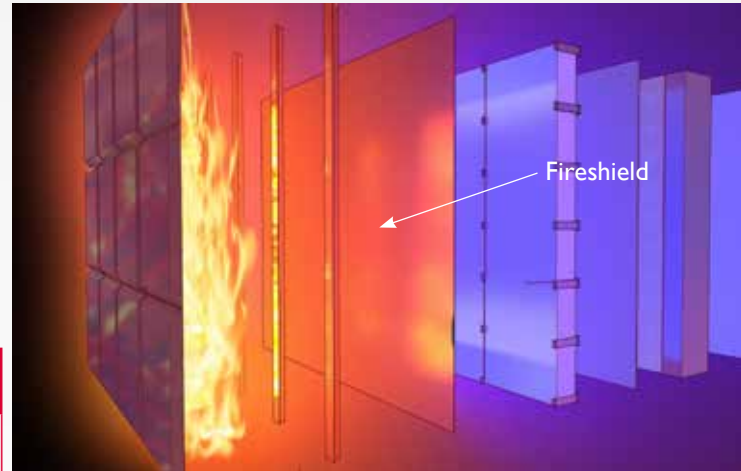

KEY BENEFITS

- The unique intumescent coating helps protect the substrate
- Vapour permeable walling underlay for use either directly onto sheathing or insulation
- Class B, s1-d0 but performs differently to other similar class products
- Complies with BS5250, BS4016 & NHBC requirements for vapour permeable walling underlays
- Ideal for use in rainscreen / façade construction
- Robust & durable
- Suitable for applications over 18m high (11m in Scotland)



Visit our website...

www.proctorgroup.com

contact@proctorgroup.com | +44 (0) 1250 872261

Revised February 2021

